


### Profile

- Control knob with integrated position indicator
- Shaft support: max.  $\varnothing$  14 mm
- Counter with 4 decades and fine reading
- Various display values
- Star wheel as an option

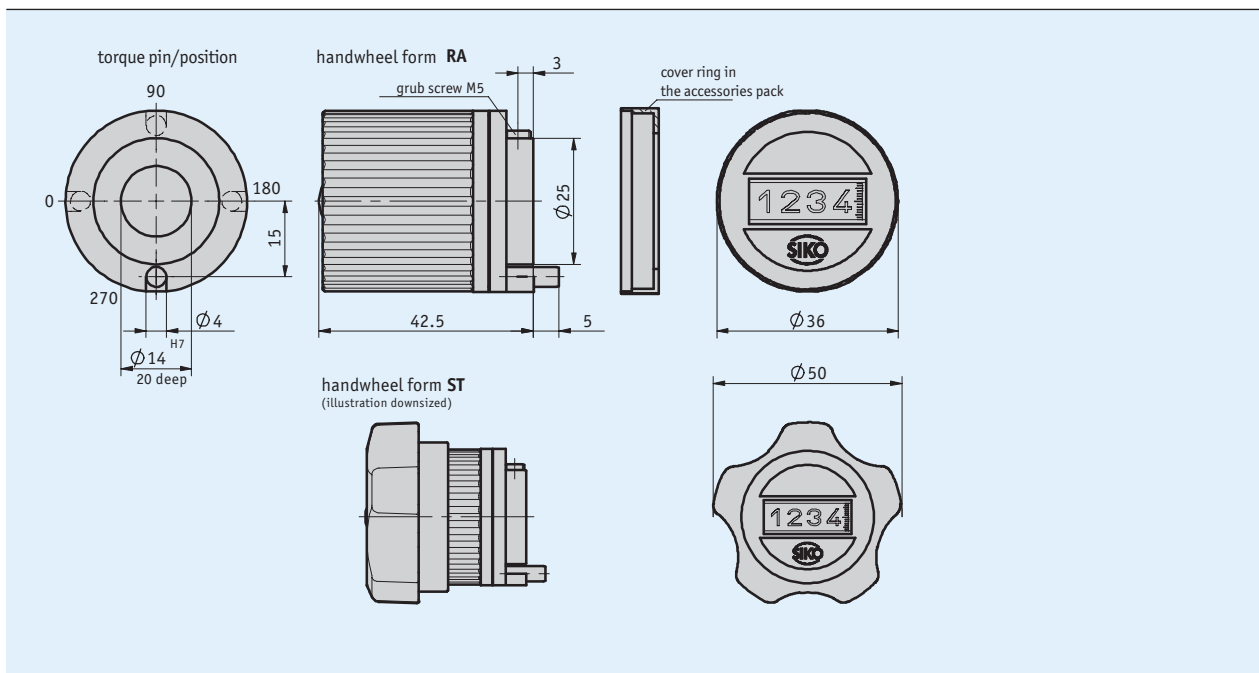

### Mechanical data

Feature	Technical data	Additional information
Housing	plastic	
Sight window	plastic	mineral glass as an option
Counter	4 decades, fine reading	
Digit height	~6 mm	
Weight	0.06 kg	

### Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	0 ... 80 °C	

### Order

#### Ordering table

Feature	Ordering data	Specification	Additional information
Indication after 1st revolution	... <b>A</b>	12/5, 15, 17/5, 20, 25, 30, 40, 50, 100 others on request	/5 = arithmetical value not displayed
Decimal place	<b>0</b>	0 = 0000	
	<b>1</b>	1 = 000.0	
	<b>2</b>	2 = 00.00	
	<b>3</b>	3 = 0.000	
Counting direction	<b>i</b>	clockwise ascending values	
	<b>e</b>	counter-clockwise ascending values	
Hollow shaft/diameter	14	∅ 14 mm	
	... <b>D</b>	RH8, RH10, RH12 others on request	reducing bushes
Torque pin/position	270	see drawing	
	0	see drawing	
	90	see drawing	
	180	see drawing	
Handwheel form	RA	knurled handle	
	ST	star knob	
Handwheel color	FR	red RAL 3000	
	S	black RAL 9005	
Cover ring	0	without cover ring	
	M	cover ring supplied	

#### Order key



Scope of delivery: DK01

Accessories:  
Reduction sleeve RH

[www.siko-global.com](http://www.siko-global.com)